




Bullnose Trash Guard For Flared Ends

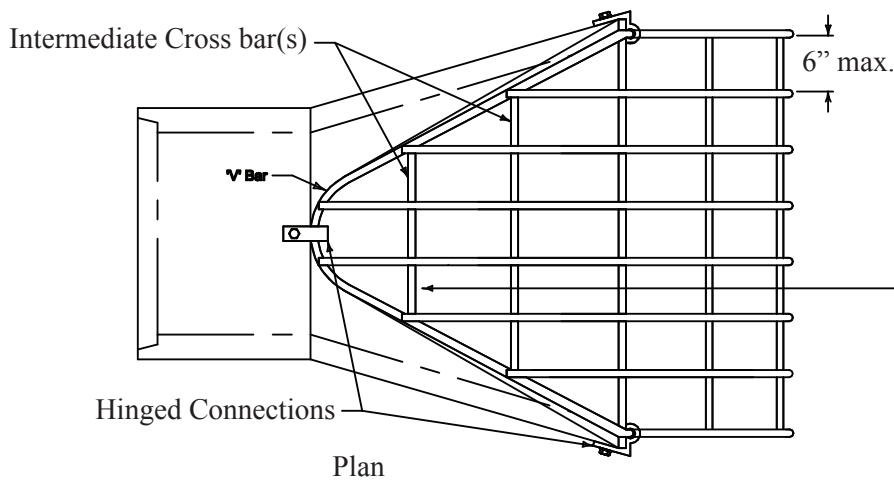

All guards to have
(1) cross bar,
60" and up to have
(2) bars
equally spaced

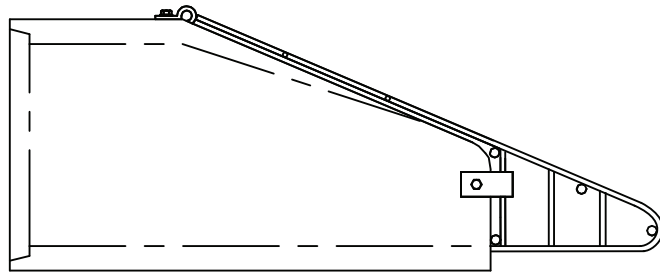

Profile

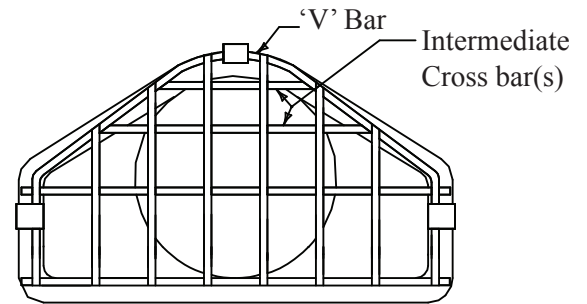

Front

Hot dip galvanized per ASTM A123

Bar Sizes			
Standard Design			
Pipe Size	Hole Dia. Required	Bolt Dia.	Bar Size
12"-18"	3/4"	5/8"	5/8"
21"-51"	7/8"	3/4"	3/4"
54"-90"	1-1/8"	1"	1"
Bolt Lg. = Pipewall Thk. + 2-1/2"			



1201 Hwy 4 South
Sleepy Eye, MN 56085
Ph: 507-794-5821
Fax: 507-794-5823
www.haala.com

Contact: Scott Haala
scott@haala.com
Ph: 507-794-5821 ext. 115
Cell: 507-920-9182